


IVY PUMPS

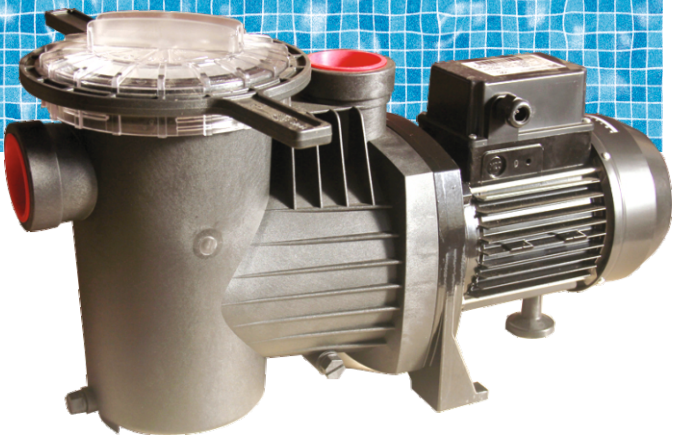

Applications: Self priming pump for pools with large pre- filter, which together with its excellent hydraulic performance, gives a very large filtering capacity.

A filter with a transparent, poly carbonate lid that easily allows inspection of the interior of the pre-filter sieve. No possible electrical contact with the water as no part of the motor is open.

Material of Construction: Pump body, lid and diffuser in polypropylene, resistant to chemical products in pools, reinforced with glass fibre, making the pump robust and durable.

Shaft in stainless steel AISI-316 noryl, impeller, transparent lid in poly carbonate.

Support -base in aluminum, mechanical seal in carbon - ceramic and Stainless Steel AISI 316. Bolts in AISI 304 Stainless Steel.

The pumps has dual connections:- Female thread of 1½” - Connection for PVC pipe Ø 50 .

Type	HP	KW	Cond µF	A												DNA	DNI
				II 230	III 230	III 400	4	6	8	10	11	12	13	14	15		
IVY25M IVY25T	0.25	0.16	12	3.4			10	8	6.0	4.0	2.5	0.5				1½ and Ø50 PVC	1½ and Ø50 PVC
					1.3	0.8											
IVY33M IVY33T	0.33	0.25	12	3.4			12	10	8.0	5.5	4.6	2.0					
					1.9	1.1											
IVY50M IVY50T	0.5	0.33	14	3.5			14	12	10.0	7.0	6.5	5.0					
					2.5	1.4											
IVY75M IVY45T	0.75	0.55	16	4.3			16	15	12.5	10.0	9.3	8.0	6.6	4.2	2		
					3	1.7											
IVY100M IVY100T	1.0	0.75	20	5.5			18	16	5.3	13.0	12.1	10.5	9.7	7.6	6		
					3.4	2.0											