


IVY 2 PUMPS

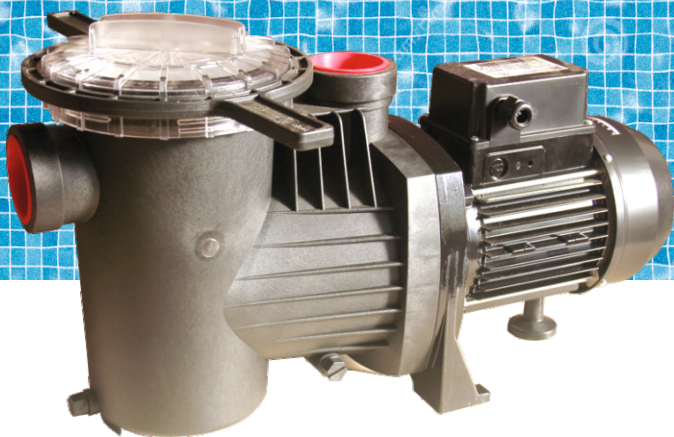

Applications: Electrical self priming pump for pools with large pre-filter and large filtering capacity.

Excellent hydraulic performance.

A filter with a transparent poly carbonate lid that allows easy inspection of the interior of the pre-filter sieve.



Sealed motor so no possible electrical contact with water.

Includes standard key for effortless opening of the pre-filter lid.

Material of Construction: Pump body, lid, base, diffuser and opening key in polypropylene, resistant to the chemical products in pools, reinforced with glass fibre, making the pump robust and durable.

Shaft in stainless steel AISI - 316, noryl impeller.

Mechanical seal in carbon ceramic. Available on request, silicon carbide / tungsten carbon / AISI 316. Bolts in AISI 304 Stainless Steel. Inlet and outlet connection 2".

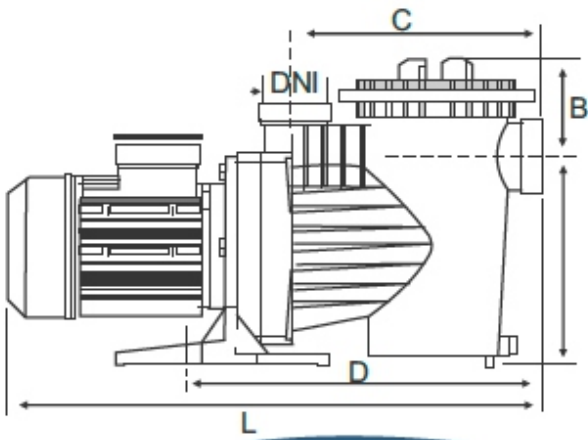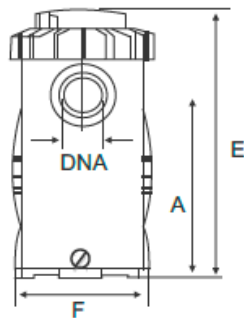

Type	HP	KW		II	"A" III	III	4	6	Manometric Height w.c.m. Flow m³/h			14	16	18	20	DNA	DNI
				230	230	400			8	10	12						
IVY2-50M IVY2-50T	0.5	0.37	14.0 -	3.6 -	- 2.4	- 1.4	17.5	15.6	13.5	11.1	8.4	-	-	-	-		
IVY2-75M IVY2-75T	0.75	0.55	16.0 -	4.75 -	- 3.1	- 1.8	19.5	18.0	15.7	13.5	10.8	7.9	-	-	-		
IVY2-100M IVY2-100T	.00	0.75	20.0 -	5.5 -	- 3.8	- 2.2	23.2	21.1	19.7	18.0	15.0	12.3	8.7	-	-	2"	2"
IVY2-150M IVY2-150T	1.5	1.00	31.5 -	7.3 -	- 5.0	- 2.9	27.0	25.0	23.0	21.0	19.0	17.0	14.0	10			
IVY2-200M IVY2-200T	.00	1.5	31.5 -	9.2 -	- 6.0	- 3.5	30.0	28.0	26.0	24.0	21.0	18.0	14.0	12			
IVY2-300M IVY2-300T	.00	2.2	40.0 -	12.2 -	- 8.6	- 5.0	34.0	32.0	30.0	29.0	27.0	23.0	20.0	15	12		