


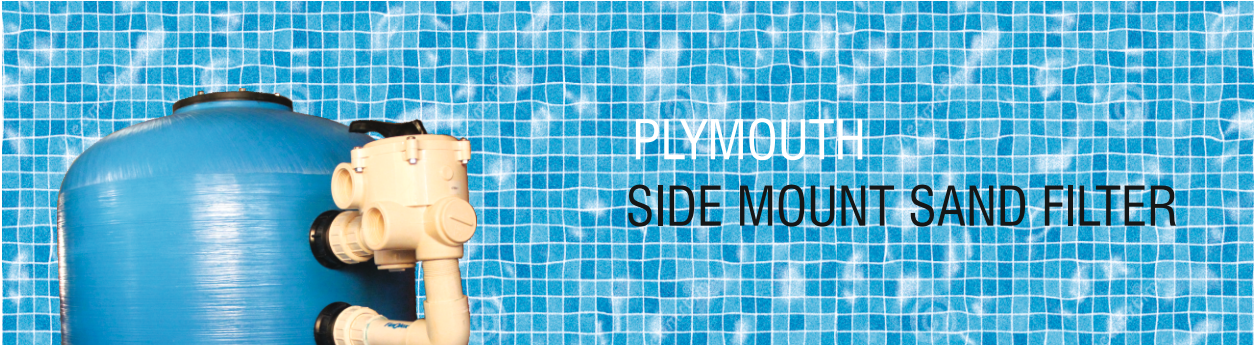

PLYMOUTH SIDE MOUNT SAND FILTER

The Bobbin Wound Side Mount Filter is made from fibre glass and polyester.


It has a transparent lid, air purge, pressure gauge and multiport valve.

Maximum working pressure 2.5 kg/cm²

* Recommended #20 White Silica sand only,
Size range 0.4 - 0.8mm.

2 Note: Maximum working pressure: 2.5 kg/cm

Maximum temperature : 50°C(122°F)

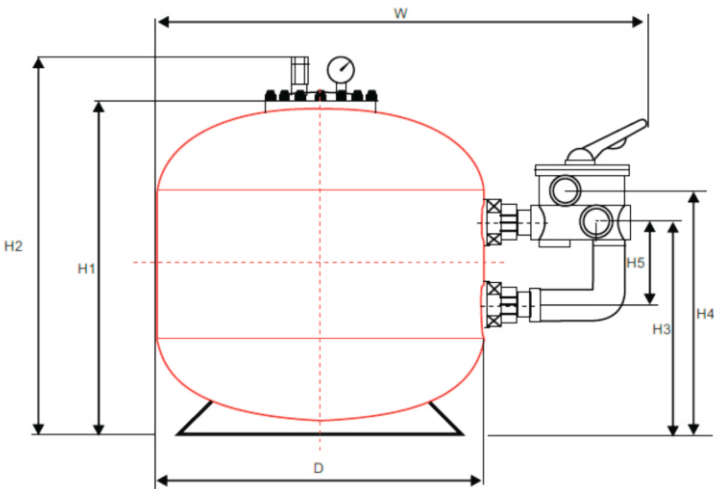

Code	Dia Inch	Flow m³/hr	Filtration Area(m²)	H1 mm	H2 mm	H3 mm	H4 mm	H5 mm	W mm	Ws kg	Package(mm) LxWxH	Nw kg	Gw kg
TS-525	1.5	12	0.19	610	720	410	475	150	885	65	550x550x650	14.1	18.1
TS-600	1.5	14	0.22	620	730	430	495	150	960	115	620x620x680	16.9	21.4
TS-650	1.5	17	0.32	695	805	450	515	150	1010	145	680x680x740	20.0	25.5
TS-700	1.5	19	0.35	715	825	470	535	150	1060	180	720x720x750	22.3	27.8
TS-750	2.0	21	0.40	765	875	540	615	200	1140	220	780x780x830	25.7	32.7
TS-800	2.0	24	0.50	815	925	550	625	200	1190	275	820x820x860	28.8	36.3
TS-900	2.0	30	0.64	900	1010	620	695	200	1290	390	920x920x950	35.4	44.9
TS-1050	2.0	38	0.88	1065	1175	700	775	200	1440	615	1055x1055x1150	53.3	58.8
TS-1200	2.0	42	1.13	1200	1310	780	855	200	1590	920	1215x1215x1280	59.8	65.4