


PLYMOUTH TOP MOUNT SAND FILTER



The Bobbin Wound Top Mount Sand Filter is made from fibre glass and polyester. It comes with a multi-port valve and pressure gauge. Sight glass is optional and can be provided. Maximum working pressure 2.5 kg/cm²

Recommended White Silica Sand only,
Size range 0.4 - 0.8mm.

2 Note: Maximum working pressure: 2.5 kg/cm
Maximum temperature : 50°C(122°F)

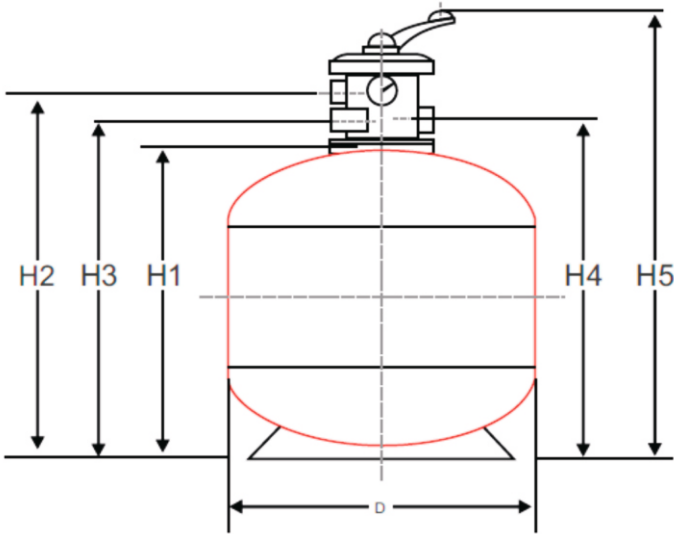

Code	Dia Inch	Flow m ³ /hr	Filtration area(m ²)	H1 mm	H2 mm	H3 mm	H4 mm	H5 mm	W mm	Package (mm) LxWxH	Nw kg	Gw kg
TT-400	1.5	8	0.13	425	539	475	475	680	35	420x420x480	7.3	9.8
TT-450	1.5	10	0.16	485	599	535	535	740	50	470x470x560	8.8	11.8
TT-525	1.5	12	0.19	610	724	660	660	865	55	550x550x650	11.8	15.8
TT-600	1.5	14	0.22	620	744	680	680	885	115	620x620x680	14.5	19.0
TT-650	1.5	17	0.32	695	809	745	745	950	145	680x680x740	17.7	23.2
TT-700	1.5	19	0.35	715	829	785	785	970	180	720x720x750	20.0	25.5
TT-750	2.0	21	0.40	785	903	829	829	1080	225	780x780x830	22.8	29.8
TT-800	2.0	24	0.50	815	953	879	879	1130	275	820x820x860	25.9	33.4
TT-900	2.0	30	0.64	900	1038	984	984	1215	390	920x920x950	32.7	42.2
TT-1050	2.0	38	0.88	1065	1203	1129	1129	1380	615	1005x1005x1105	50.9	56.4
TT-1200	2.0	42	1.13	1200	1338	1264	1264	1515	920	1215x1215x1280	57.6	63.2