


LANCE JET I

This series is the most widely used in the world of water feature fountains. They are also fitted with one or two inner jet cut-offs that ensure the optimal quality of the water jet up to the heights shown on the technical data sheet. They also have a smooth ball joint that can reach a maximum slope of 20°, thereby enabling parabolic jets to be designed with no additional parts.

- Water appearance
- Wind resistance
- Splash
- Sound level
- Visibility
- Clear

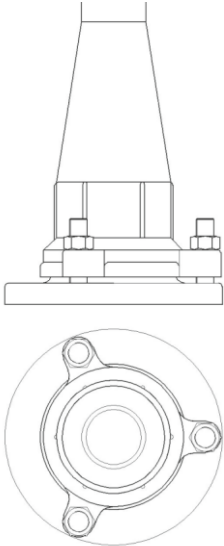

Dimension	Connection A BSP/NPT	Outlet B (mm)	Length (mm)	Straighteners	Angle(a)	Weight (kg)	Performance											
Reference							Spray height(m)	0,5	1	2	3	4	6	7	8	10	12	
							m.c.a	0,60	1,25	2,20	3,40	4,50	6,60					
F2313832	G 3/8" M	Ø4	45 x Ø20	1	18°	0,05	l/min	0,70	2,00	4,00								
F2313865	G 3/8" M	Ø6	45 x Ø20	1	18°	0,05	l/min	4,50	7,00	11,7	15,0							
F2311233	G 1/2" M	Ø8	65 x Ø23	1	12°	0,10	l/min	10,0	14,0	21,5	27,5	32,5						
F2311266	G 1/2" M	Ø10	65 x Ø23	1	12°	0,08	l/min	17,0	23,0	33,0	42,0	50,0	64,0					
							m.c.a	1,40	2,10	3,30	4,40	6,00	8,40	9,00	10,10	13,90	15,90	
F2311064	G 1/2" M	Ø12	96 x Ø39	2	18°	0,34	l/min	30,0	37,0	50,0	62,0	72,0	91,0					
F2311031	G 1/2" M	Ø14	96 x Ø39	2	18°	0,33	l/min	32	46	70	86	102	128	140	150			
F2311536	G 1/2" M	Ø16	142 x Ø55	2	20°	0,90	l/min	53	62	87	106	124	151	165	177	197		
F2311569	G 1/2" M	Ø19	142 x Ø55	2	20°	0,87	l/min	75	88	122	150	173	214	233	250	286	320	