

PLYMOUTH CARTRIDGE FILTER

Thermalec Cartridge Filter is fabricated from high impact fiberglass reinforced polypropylene and designed for easy maintenance. The single piece compact injection molded tank with easy lock ring system allows ease of maintenance and years of trouble free operation.

The cartridge filter comes with connection unions.


Single piece compact injection molded filter tank with easy locking ring system.

- Quick union design for easy installation
- NSF certified raw material
- Chemical and climate resistant
- Fibreglass reinforced polypropylene tank for exceptional strength and long life
- Cartridge media is easy to clean and can be reused

Filter Cartridge Specifications

Mode	ITCF25	TCF50	TCF75	TCF100
Cartridge Dia(inches/mm)	7/178			
Cartridge Length(inches/mm)	9.8/250	19.6/498	29.4/748	29.4/748
Filtration Area(sq. ft)	25	50	75	100

*Flow Rate is determined by the pump size and the piping system

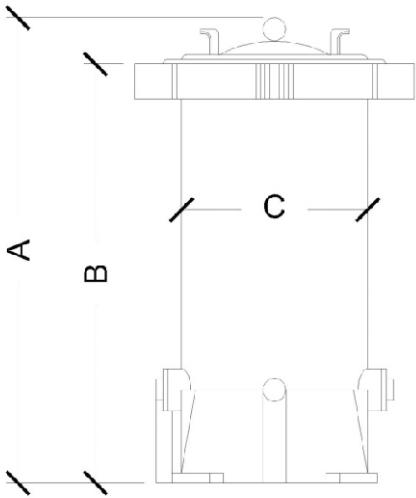

Model	F12 m ²	Working	Design Flow Rate*	
TCF25	25 2.3	50PSI	95LPM	
TCF50	50	4.7	50PSI	190LPM
TCF75	75	7.0	50PSI	284LPM
TCF100	100	9.3	50PSI	378LPM

Easy Cleaning & Reusable Cartridge Element

Cartridges have extra dirt-holding capacity and are engineered from durable high quality materials for longer service life. Remove and flush the cartridge element with water hose.

